


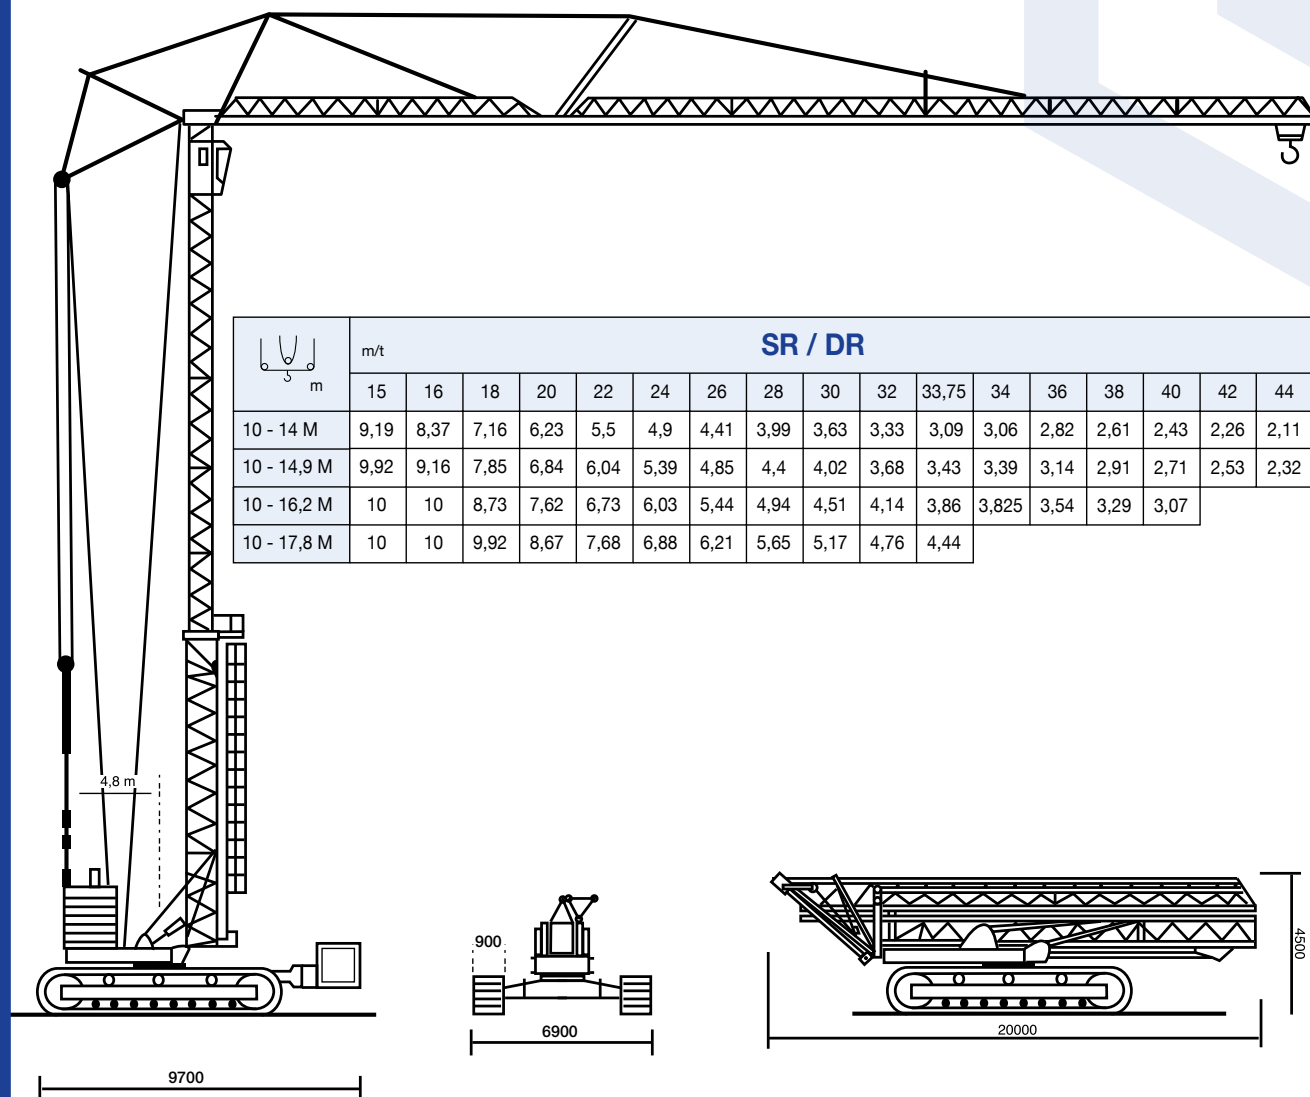

	SR / DR																				Potain 400		
	15	16	18	20	22	24	26	28	30	32	33,75	34	36	38	40	42	44	45	46	48	50		
10 - 14 M	9,19	8,37	7,16	6,23	5,5	4,9	4,41	3,99	3,63	3,33	3,09	3,06	2,82	2,61	2,43	2,26	2,11	2,04	1,97	1,85	1,73		
10 - 14,9 M	9,92	9,16	7,85	6,84	6,04	5,39	4,85	4,4	4,02	3,68	3,43	3,39	3,14	2,91	2,71	2,53	2,32	2,28					
10 - 16,2 M	10	10	8,73	7,62	6,73	6,03	5,44	4,94	4,51	4,14	3,86	3,825	3,54	3,29	3,07								
10 - 17,8 M	10	10	9,92	8,67	7,68	6,88	6,21	5,65	5,17	4,76	4,44												

Technische gegevens

Hijzen	2 Draads		4 Draads	
1e snelheid 	4,4 m/min.	5000 kg	2,2 m/min.	10000 kg
2e snelheid 	24 m/min.	5000 kg	12 m/min.	10000 kg
3e snelheid 	48 m/min.	2500 kg	24 m/min.	5000 kg
Loopkat	7,5 - 30 - 60m/min.			
Zwenken	0 - 0,7 omw./min.			
Kraanrijden	max. 25 m/min.			
Gronddruk	1,2 kg./cm ²			
Stroom / spanning	63 Ampere 380 V			
Generatorset	100 KVA			

Haakhoogtes

33.4 m
29.8 m
26.2 m
22.6 m